


Female Pipe (N.P.T.) x Female Pipe (N.P.T.)

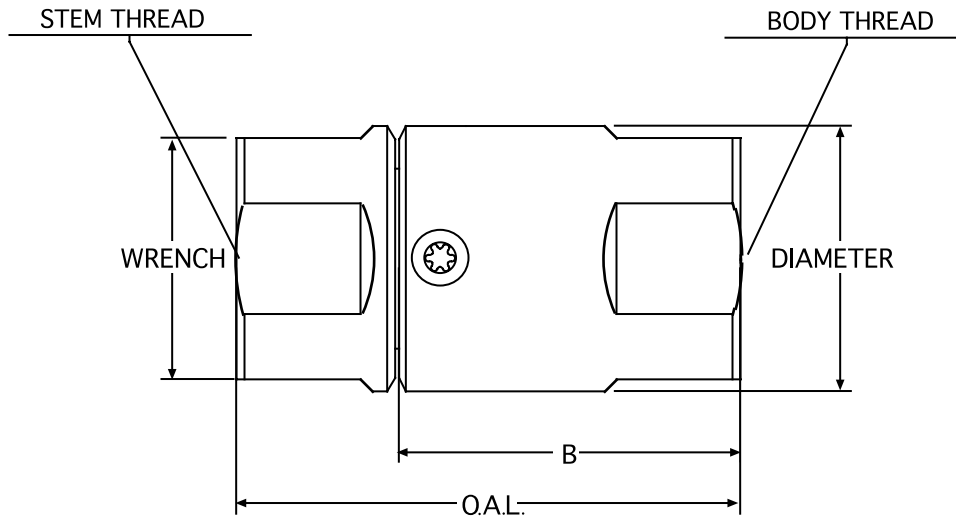

PART NUMBER	O.A.L	DIM. B	STEM THREAD	BODY THREAD	DIAMETER	WRENCH	MAX P.S.I.G.	THROUGH HOLE
SS 2 FP 12.5 X FP 12.5	1.784	1.225	1/8-27 N.P.T.	1/8-27 N.P.T.	.734	.625	5000	.157
SS 4 FP 25 X FP 25	2.570	1.720	1/4-18 N.P.T.	1/4-18 N.P.T.	0.992	0.875	5000	.250
SS 8 FP 38 X FP 38	2.835	1.850	3/8-18 N.P.T.	3/8-18 N.P.T.	1.292	1.125	5000	.530
SS 8 FP 50 X FP 50	2.835	1.850	1/2-14 N.P.T.	1/2-14 N.P.T.	1.480	1.250	5000	.530
SS 12 FP 75 X FP 75	2.835	1.850	3/4-14 N.P.T.	3/4-14 N.P.T.	1.675	1.500	4500	.689
SS 16 FP 100 X FP 100	3.655	2.480	1-11 ¹ / ₂ N.P.T.	1-11 ¹ / ₂ N.P.T.	1.917	1.750	4000	.906
SS 20 FP 125 X FP 125	4.065	2.685	1 ¹ / ₄ -11 ¹ / ₂ N.P.T.	1 ¹ / ₄ -11 ¹ / ₂ N.P.T.	2.357	2.125	4000	1.181
SS 24 FP 150 X FP 150	4.665	3.285	1 ¹ / ₂ -11 ¹ / ₂ N.P.T.	1 ¹ / ₂ -11 ¹ / ₂ N.P.T.	2.547	2.375	4000	1.312
SS 32 FP 200 X FP 200	5.165	3.785	2-11 ¹ / ₂ N.P.T.	2-11 ¹ / ₂ N.P.T.	3.052	2.875	3000	1.781
SS 40 FP 250 X FP 250	5.165	3.785	2 ¹ / ₂ -8 N.P.T.	2 ¹ / ₂ -8 N.P.T.	3.572	3.375	2500	2.125