


## Male J.I.C. (37°) x Female Pipe (N.P.T.)

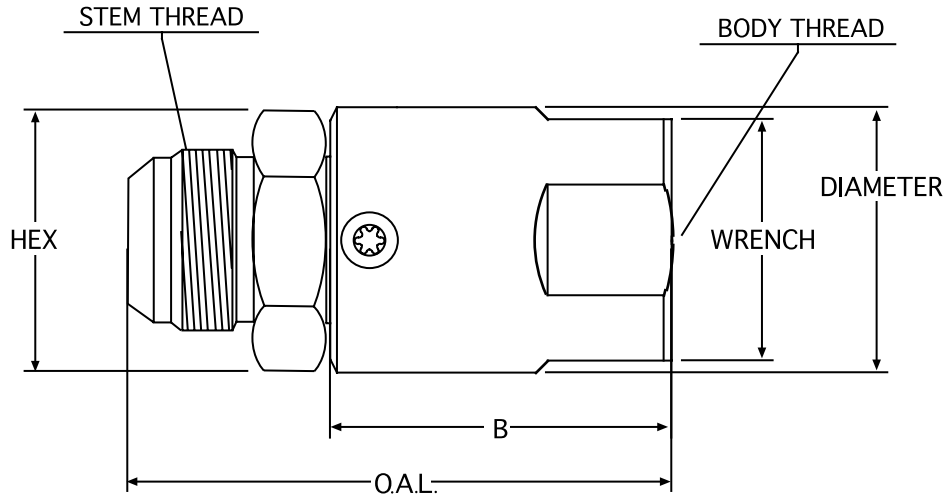

Not Available  
In Stainless Steel!

PART NUMBER	O.A.L	DIM. B	STEM THREAD	BODY THREAD	HEX	DIAMETER	WRENCH	MAX P.S.I.G.	THROUGH HOLE
SS 4 MJ 6 X FP 25	2.670	1.720	9/16-18 U.N.	1/4-18 N.P.T.	0.750	0.992	0.875	5000	.250
SS 8 MJ 8 X FP 38	2.935	1.850	3/4-16 U.N.	3/8-18 N.P.T.	1.000	1.292	1.125	5000	.406
SS 8 MJ 8 X FP 50	2.935	1.850	3/4-16 U.N.	1/2-14 N.P.T.	1.000	1.480	1.250	5000	.406
SS 8 MJ 10 X FP 50	3.035	1.850	7/8-14 U.N.	1/2-14 N.P.T.	1.000	1.480	1.250	5000	.484
SS 12 MJ 12 X FP 75	3.210	1.850	1 <sup>1</sup> / <sub>16</sub> -12 U.N.	3/4-14 N.P.T.	1.375	1.675	1.500	4500	.609
SS 16 MJ 16 X FP 100	3.925	2.480	1 <sup>5</sup> / <sub>16</sub> -12 U.N.	1-11 <sup>1</sup> / <sub>2</sub> N.P.T.	1.625	1.917	1.750	4000	.844
SS 20 MJ 20 X FP 125	4.230	2.685	1 <sup>5</sup> / <sub>8</sub> -12 U.N.	1 <sup>1</sup> / <sub>4</sub> -11 <sup>1</sup> / <sub>2</sub> N.P.T.	1.750	2.357	2.125	4000	1.078
SS 24 MJ 24 X FP 150	5.050	3.285	1 <sup>7</sup> / <sub>8</sub> -12 U.N.	1 <sup>1</sup> / <sub>2</sub> -11 <sup>1</sup> / <sub>2</sub> N.P.T.	2.125	2.547	2.370	4000	1.312