


Female Face Seal (F.F.S.) x Male Face Seal (M.F.S.)

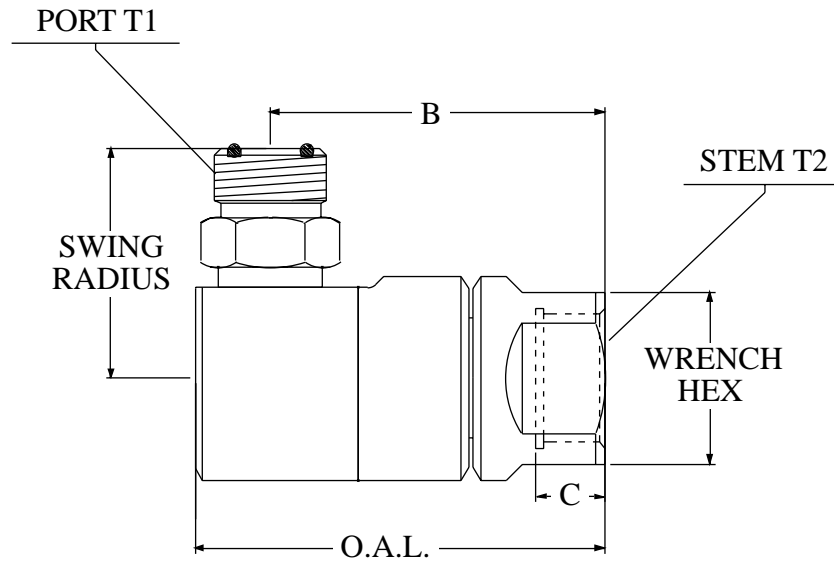

Not Available
In Stainless Steel!

PART NUMBER	O.A.L.	DIM. B	DIM. C	PORT T1	STEM T2	WRENCH/HEX	SWING RADIUS	MAX P.S.I.G.	THROUGH HOLE
9SS 4 FFS 6 X MFS 6	2.737	2.225	0.375	11/16-18 U.N.	11/16-16 U.N.	0.875	1.450	5000	0.250
9SS 8 FFS 8 X MFS 8	2.970	2.423	0.433	13/16-16 U.N.	13/16-16 U.N.	1.250	1.706	5000	0.264
9SS 8 FFS 10 X MFS 10	2.970	2.423	0.504	1-14 U.N.	1-14 U.N.	1.250	1.826	5000	0.297
9SS 12 FFS 12 X MFS 12	3.150	2.510	0.571	1 ³ / ₁₆ -12 U.N.	1 ³ / ₁₆ -12 U.N.	1.500	2.135	4500	0.378
9SS 16 FFS 16 X MFS 16	3.800	3.212	0.583	1 ⁷ / ₁₆ -12 U.N.	1 ⁷ / ₁₆ -12 U.N.	1.750	2.255	4000	0.484
9SS 20 FFS 20 X MFS 20	4.515	3.670	0.583	1 ¹¹ / ₁₆ -16 U.N.	1 ¹¹ / ₁₆ -12 U.N.	2.125	2.658	4000	0.718
9SS 24 FFS 24 X MFS 24	5.890	4.660	0.583	2-12 U.N.	2-12 U.N.	2.375	2.845	4000	0.811